

NEW FEATURES FOR 2020

OVERHEAD ORBITAL MOTOR

▶ Currently available on 20', 24', 28' and 32' trailer mounts only*



DEUTZ OR KUBOTA ENGINE

▶ Multiple Engine Options



AUGER SADDLE UPDATE



FERTILIZER TENDER BOXES

TRUCK OR TRAILER MOUNT

SIDE OR OVERHEAD DISCHARGE



825 MAIN STREET | LYONS, NEBRASKA 68038

888-687-2655

WWW.BREHMER.COM

* Overhead orbital motor currently not available on truck mount and 52' trailer mount



11262019-5

WWW.BREHMER.COM

LYONS, NEBRASKA

888-687-2655





At Brehmer, we're proud to be a partner to the agriculture industry. We know the importance of correct fertilizer application and the roll it plays in your operation. That's why we build with quality materials and implement time and cost-saving features. We build each tender box to suite your needs by asking the right questions at the start of a project.

All Brehmer Fertilizer Tenders are built with:

- EZ Slide Gate System**
- Run gates full-open without clogging
- LOW Center of Gravity**
- Unique to Brehmer Tenders
- Increases safety, decreases turnovers
- 304 Stainless Steel Bin Construction and Auger Flighting**

- Filled-In Tarp Bow System**
- Individual Hopper Ladders**
- Reinforced Corner Gussets**
- Unloading Capacity of 3500-4000 lbs/min**
- Grease Banks**
- Unique Bearing Design**
- 2" Clean-Outs**

SIDE DISCHARGE TENDER


FEATURES:

Self-Locking Hydraulic Discharge Auger

OPTIONS:

- Split Bins
- Diesel/Propane/Gas Engines or Wet Kit Available
- Stainless Steel Fenders

COLOR OPTIONS:

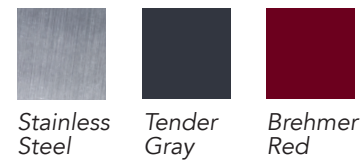

TRUCK MOUNT



18' Side Discharge Truck Mount shown in Brehmer Red

TENDER SIZE	16'	18'	20'	24'
Travel Height	7'2"			
Auger Length	16'7"			
Discharge Height - MIN	7'1"			
Discharge Height - MAX	14'2"			
Auger Reach - SIDE	13'4"			
Standard Cubic Feet	569	663	711	854
6" Taller Cubic Feet	633	735	791	950

Discharge height is measured from the top of the existing truck frame.

TRAILER MOUNT



24' Side Discharge Mounted on a 45' Trailer Mount shown in Brehmer Red

TENDER SIZE	20'	24'	28'	32'
Travel Height	10'8"			
Auger Length	16'7"			
Discharge Height - MIN	10'7"			
Discharge Height - MAX	17'8"			
Auger Reach - SIDE	13'4"			
Standard Cubic Feet	711	854	996	1138
6" Taller Cubic Feet	791	950	1107	1265

Discharge height is measured from the top of the existing trailer frame.

OVERHEAD DISCHARGE TENDER

FEATURES:

Overhead Orbital Motor

*Available on 20', 24', 28' and 32' trailer mounts only**

270° Rotation Auger System

10" Belly, 13" Vertical, 10" Discharge

OPTIONS:

- Split Bins
- Diesel/Propane/Gas Engines or Wet Kit Available
- Stainless Steel Fenders

COLOR OPTIONS:



TRUCK MOUNT



18' Overhead Discharge Truck Mount shown in Stainless Steel

TENDER SIZE	16'	18'	20'	24'
Travel Height	8'10"			
Auger Length	16'10"			
Discharge Height - MIN	7'2"			
Discharge Height - MAX	17'8"			
Auger Reach - SIDE	13'7"			
Auger Reach - REAR	14'7"			
Standard Cubic Feet	569	663	711	854
6" Taller Cubic Feet	633	735	791	950

Discharge height is measured from the top of the existing truck frame.

TRAILER MOUNT



24' Overhead Discharge Mounted on a 45' Trailer Mount shown in Tender Gray

TENDER SIZE	20'	24'	28'	32'
Travel Height	12'4"			
Auger Length	16'10"			
Discharge Height - MIN	10'8"			
Discharge Height - MAX	21'3"			
Auger Reach - SIDE	13'8"			
Auger Reach - REAR	14'7"			
Standard Cubic Feet	711	854	996	1138
6" Taller Cubic Feet	791	950	1107	1265

Discharge height is measured from the top of the existing trailer frame.